

1.3. THE ANATOMY OF A CHEMICAL MANUFACTURING PROCESS

The basic components of a typical chemical process are shown in Figure 1.3, in which each block represents a stage in the overall process for producing a product from the raw materials. Figure 1.3 represents a generalised process; not all the stages will be needed for any particular process, and the complexity of each stage will depend on the nature of the process. Chemical engineering design is concerned with the selection and arrangement of the stages, and the selection, specification and design of the equipment required to perform the stage functions.


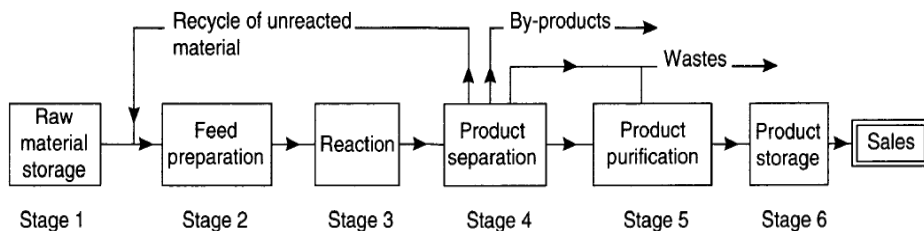




Figure 1.3. Anatomy of a chemical process

PROCESS FLOW-SHEETING


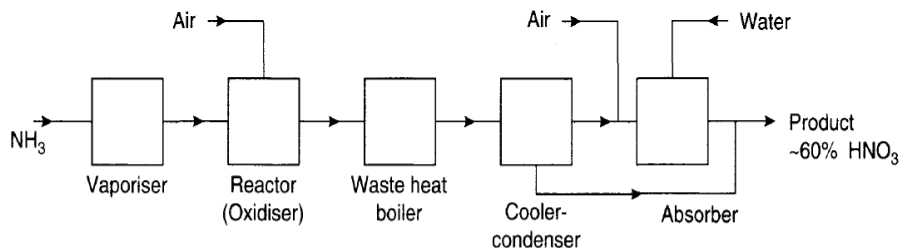


Schematic (block) diagram; production of nitric acid by oxidation of ammonia

The principal reactions in the reactor (oxidiser) are:



The nitric oxide formed can also react with ammonia:

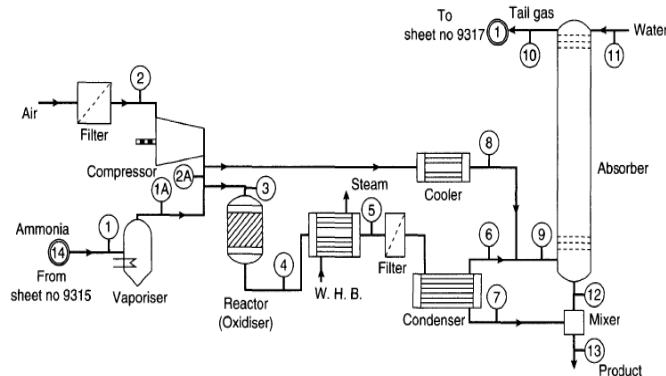

Flows kg/h Pressures nominal

| Line no. | 1 | 1A | 2 | 2A | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | |
|------------------|---------|---------|----------|----------|----------|-------------------------|--------------------|-----------|-----------|-----------|----------|------------------------|--------|----------|---------|-------------------------|
| Stream | Ammonia | Ammonia | Filtered | Oxidiser | Oxidiser | Oxidiser | W.H.B. | Condenser | Condenser | Secondary | Absorber | Tail(2) | Water | Absorber | Product | C & R Construction Inc |
| Component | feed | vapour | air | air | feed | outlet | outlet | gas | acid | air | feed | gas | feed | acid | acid | |
| NH ₃ | 731.0 | 731.0 | — | — | 731.0 | Nil | — | — | — | — | — | — | — | — | — | Nitric acid 60 per cent |
| O ₂ | — | — | 3036.9 | 2628.2 | 935.7 | (935.7) ⁽¹⁾ | 275.2 | Trace | 408.7 | 683.9 | 371.5 | — | Trace | Trace | Trace | 100,000 l/y |
| N ₂ | — | — | 9990.8 | 8644.7 | 8668.8 | 8668.8 | 8668.8 | Trace | 1346.1 | 10,014.7 | 10,014.7 | — | Trace | Trace | Trace | Client BOP Chemicals |
| NO | — | — | — | — | 1238.4 | (1238.4) ⁽¹⁾ | 202.5 | — | — | 202.5 | 21.9 | — | Trace | Trace | Trace | SLIGO |
| NO ₂ | — | — | — | — | — | Trace | (7) ⁽¹⁾ | 967.2 | — | — | 967.2 | (Trace) ⁽¹⁾ | — | Trace | Trace | Sheet no. 9316 |
| HNO ₃ | — | — | — | — | — | Nil | Nil | — | 850.6 | — | — | — | — | 1704.0 | 2554.6 | |
| H ₂ O | — | — | Trace | — | — | 1161.0 | 1161.0 | 29.4 | 1010.1 | — | — | 29.4 | 26.3 | 1376.9 | 1136.0 | 2146.0 |
| Total | 731.0 | 731.0 | 13,027.7 | 11,272.9 | 12,003.9 | 12,003.9 | 10,143.1 | 1860.7 | 1754.8 | 11,897.7 | 10,434.4 | 1376.9 | 2840.0 | 4700.6 | | |
| Press bar | 8 | 8 | 1 | 8 | 8 | 8 | 8 | 1 | 8 | 8 | 1 | 8 | 1 | 1 | | Dwg by Date |
| Temp. C | 15 | 20 | 15 | 230 | 204 | 907 | 234 | 40 | 40 | 40 | 25 | 40 | 40 | 43 | | Checked 25/7/1980 |

Essential information

1. Stream composition, either:
 - (i) the flow-rate of each individual component, kg/h, which is preferred, or
 - (ii) the stream composition as a weight fraction.
2. Total stream flow-rate, kg/h.
3. Stream temperature, degrees Celsius preferred.
4. Nominal operating pressure (the required operating pressure).

Optional information

1. Molar percentages composition.
2. Physical property data, mean values for the stream, such as:
 - (i) density, kg/m³,
 - (ii) viscosity, mN s/m².
3. Stream name, a brief, one or two-word, description of the nature of the stream, for example "ACETONE COLUMN BOTTOMS".
4. Stream enthalpy, kJ/h.

4.2.8. Batch processes

Flow-sheets drawn up for batch processes normally show the quantities required to produce one batch. If a batch process forms part of an otherwise continuous process, it can be shown on the same flow-sheet, providing a clear break is made when tabulating the data between the continuous and batch sections; the change from kg/h to kg/batch. A continuous process may include batch make-up of minor reagents, such as the catalyst for a polymerisation process.

4.2.9. Services (utilities)

To avoid cluttering up the flow-sheet, it is not normal practice to show the service headers and lines on the process flow-sheet. The service connections required on each piece of equipment should be shown and labelled. The service requirements for each piece of equipment can be tabulated on the flow-sheet.







4.2.10. Equipment identification

Each piece of equipment shown on the flow-sheet must be identified with a code number and name. The identification number (usually a letter and some digits) will normally be that assigned to a particular piece of equipment as part of the general project control procedures, and will be used to identify it in all the project documents.

If the flow-sheet is not part of the documentation for a project, then a simple, but consistent, identification code should be devised. The easiest code is to use an initial letter to identify the type of equipment, followed by digits to identify the particular piece. For example, H — heat exchangers, C — columns, R — reactors. The key to the code should be shown on the flow-sheet.

APPENDIX A

Basic and developed symbols for plant and equipment

| | |
|---|--|
| Heat transfer equipment | |
| Heat exchanger (basic symbols) |  |
| Alternative: |  |
| Shell and tube: fixed tube sheet |  |
| Shell and tube: U tube or floating head |  |
| Shell and tube: kettle reboiler |  |
| Air - blown cooler |  |

PROCESS STRUCTURE

Because of the numerous process types, it is essential to be able to divide a process into a minimum number of basic logical operations to aid in the understanding of existing processes and in the development and design of new processes. The electrical engineer designs electrical circuits consisting of transistors, resistors, capacitors and other basic elements. Similarly, the chemical engineer designs process circuits consisting of reactors, separators, and other process units. Early in the development of chemical engineering the concept of unit operations and processes evolved to isolate the basic elements of a process. Unit operations consist of physical changes, such as distillation and heat transfer, and unit processes consist of chemical changes, such as nitration and oxidation. Thus, any process consists of a combination of unit operations and processes. Trescott [18] discusses the history of this concept.

A modification of the unit-operations, unit-process division is shown in Table 1.3, where a process is divided into nine basic process operations. According to this division, the unit operations are subdivided into several basic operations and conversion is substituted for all unit processes for a total of nine process

Table 1.3 Basic Process Operations

1. Conversion

Thermochemical
Biochemical
Electrochemical
Photochemical
Plasma
Sonochemical

2. Separations

Component (Examples)

Distillation
Absorption
Extraction
Adsorption

Phase(Examples)

Gas-Liquid
Gas-Solid
Liquid-Liquid
Liquid-Solid

3. Mixing

Component

Dissolving

Phase (Examples)

Gas-Liquid
Gas-Solid
Liquid-Liquid
Liquid-Solid
Solid-Solid

4. Material Transfer

Pumping Liquids
Compressing Gases
Conveying Solids

5. Energy Transfer

Expansion
Heat Exchange

6. Storage

Raw Materials
Internal
Products

7. Size reduction

8. Agglomeration

9. Size Separation










Figure 1.3 Glucose-process flow diagram.

Table 1.4 Glucose Production Process Operations

| Process Unit | Process Conditions | Process Operations |
|-------------------|---|----------------------|
| Hydrolyzer, R-1 | Time – 2 h Feed – 30 - 40% solids Temperature – 80 - 90 °C pH – 5.5 - 7.0 Hydrolysis – 15 - 25 % | Conversion Mixing |
| Interchanger, H-1 | | Energy Transfer |
| Heater, H-2 | | Energy Transfer |
| Centrifuge, PS-1 | Solids Removed 0.3 - 0.4 % protein 0.5 - 0.6 % fat | Phase Separation |
| Hydrolyzer, R-2 | Time – 48 - 72 h Temperature – 55 - 60 °C pH – 4.0 - 4.5 Dissolved Solids – 97.0 - 98.5 % glucose | Conversion Mixing |
| Pump, P-1 | | Material Transfer |
| Adsorber, CS-1 | | Component Separation |
| Tank, S-1 | | Storage |
| Pump, P-2 | | Material Transfer |

| Evaporators (contains three effects or stages) | | |
|--|---|--|
| 1 st Effect 2 nd Effect 3 rd Effect | Product – 40 - 58% solids Product – 58 - 70% solids Product – 70 - 78% solids | |
| <u>First Effect</u> Evaporator, CS-2 Flash Drum, PS-2 Compressor, C-1 Pump, P-3 Adsorber, CS-3 Ion Exchanger, R-3 Tank, S-2 | | Component Separation Phase Separation Material Transfer Material Transfer Component Separation Conversion Storage |
| <u>Second Effect</u> Pump, P-4 Evaporator, CS-2 Flash Drum, PS-3 Barometric Condensers 2 stages, CS-5, CS-6 Steam Jet Ejectors 2 stages, C-2, C-3 | | Material Transfer Component Separation Phase Separation Component Separation & Phase Separation Material Transfer & Mixing |
| <u>Third Effect</u> Crystallizer, CS-10 | Seed crystals – 20 - 25% of the batch Temperature – from 43 - 46 °C to 20 - 39 °C Time – 2 days Yield – 60% crystals | Same as Second Effect Component Separation |
| Conveyor, CV-1 | | Material Transfer |
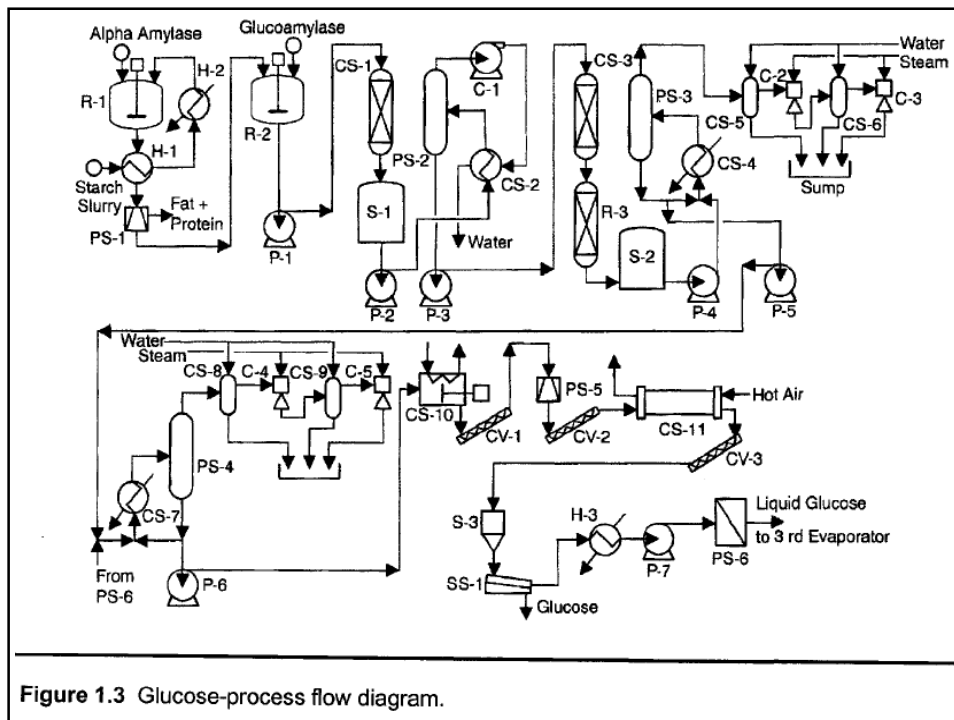
| | | |
|-----------------------|--------------------------------|----------------------|
| Conveyor, CV-1 | Product – 14% H ₂ O | Material Transfer |
| Centrifuge, PS-5 | | Phase Separation |
| Conveyor, CV-2 | | Material Transfer |
| Rotary Dryer, CS-11 | | Component Separation |
| Conveyor, CV-3 | | Material Transfer |
| Bin, S-3 | | Storage |
| Melter, H-3 | | Energy Transfer |
| Pump, P-7 | | Material Transfer |
| Pressure Filter, PS-6 | | Phase Separation |

| APPENDIX A | |
|--|--|
| <i>Graphical Symbols for Piping Systems and Plant</i> | |
| APPENDIX A | |
| Basic and developed symbols for plant and equipment | |
| Heat transfer equipment | |
| Heat exchanger (basic symbols) |  |
| Alternative: |  |
| Shell and tube: fixed tube sheet |  |
| Shell and tube: U tube or floating head |  |
| Shell and tube: kettle reboiler |  |
| Air - blown cooler |  |